


Wear Alert UHMW-PE Wear Shoes



Wear Alert Shoes from Senqcia Maxco eliminates the guess work of when the time is right to replace or reverse your worn wearshoes. Shoes that are too badly worn cannot be reversed, losing a substantial part of the investment made in reversible shoes. With the Wear Alert Shoe from Senqcia Maxco, a visible wear indicator appears when 50% of the shoe thickness is worn away. Made from UHMW-PE of 5 million dL/g, the Wear Alert shoe provides excellent durability and wear resistance. Available in standard floor and return shoe with lug configuration.

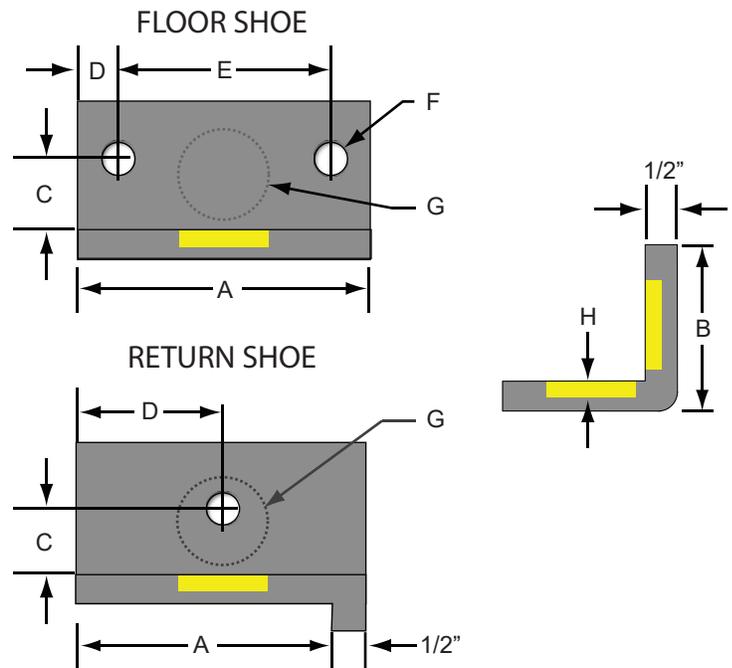


Dimensions in Inches

Part No.	Type	Material	A	B	C	D	E	F	G (dia)	H (thk)
WAFS	Floor Shoe	UHMW-PE	5.500	3.0	1.375	0.875	3.750	0.500	1.500	1/4"
WARS	Return Shoe	UHMW-PE	4.500	3.0	1.375	2.250	-	0.500	1.500	1/4"

Standard UHMW Black Wear Shoes



Wear shoes from MAXCO Chain, Ltd. come standard as a molded UHMW-PE Black Repro. Made from partially recycled UHMW-PE of 5 million dL/g the wear shoe provides excellent durability and wear resistance compared to competitive materials. All of this at a much more economical price than that of Virgin UHMW, Nylon, and Urethane. All shoes are 1/2" thick and come in floor, return w/lug, and return w/o lug styles. For added utility, consider adding Wear Alert versions to your tank to act as a visual indicator for shoe reversal and replacement maintenance.

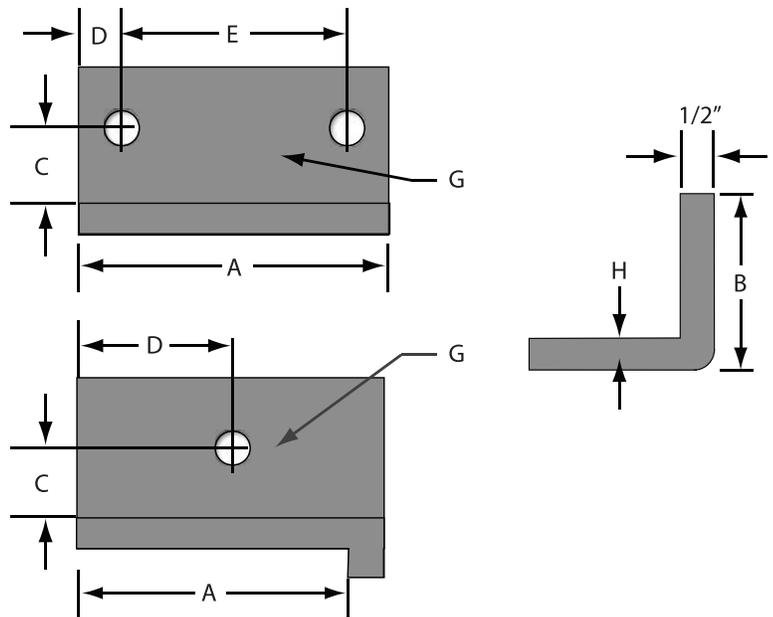

Specifications

Dimensions Are Given In Inches

Part Number	Type	Material	A	B	C	D	E	F	G (dia)	H (thk)
HSTD187	Floor Shoe	UHMW-PE	5.5	3.0	1.375	0.875	3.75	0.5	1.5	0.25
HSTD168	Return Shoe	UHMW-PE	4.5	3.0	1.375	2.250	-	0.5	1.5	0.25"